

# Hose Reel Worksheet

To have Hosecraft USA select a reel, fill out this simple worksheet and email to [sales@hosecraftusa.com](mailto:sales@hosecraftusa.com), or fax to 312-421-6327.

## 1. Who is the reel for?

Contact		Date / /	
Company		Position	
Street Address			
City	State	Zip	Country
Phone ( )	Fax ( )	Email	

## 2. What is the reel for?

**HOSE** (check one):  Storage only  Live Single hose  Live Dual hose

Inside diameter: \_\_\_\_\_ Hose length: \_\_\_\_\_ Bend radius: \_\_\_\_\_ Flat hose dimensions: \_\_\_\_\_  
 Outside diameter: \_\_\_\_\_ Hose weight: \_\_\_\_\_ Coupling spacing: \_\_\_\_\_

**Type of product handled live application:** (check one):  
 Liquid (specify): \_\_\_\_\_  Temperature: \_\_\_\_\_  Oxygen/Acetylene: \_\_\_\_\_  Other (specify): \_\_\_\_\_  
 Gases (specify): \_\_\_\_\_  Pressure: \_\_\_\_\_  Hydraulic fluid (specify): \_\_\_\_\_

**Fluid path type:** (check one):  Steel (standard)  Aluminum  Stainless Steel  Other

**Reel inlet type:** (check one):  Swivel joint 90° (standard)  Straight

**Reel outlet type (riser):** Size: \_\_\_\_\_

**Thread** (check one):  National Pipe Thread (NPT)  Joint Industry Committee (JIC)  Other  
 National Standard Thread (NST)  British Standard Pipe (BSP)

Indicate your custom specifications

**CABLE** (check one):  Live\*  Storage only

\*Number of conductors, or wire gauge, required: \_\_\_\_\_

\*Number of connectors: \_\_\_\_\_ Cable weight: \_\_\_\_\_ Cable length: \_\_\_\_\_  
 \*Voltage: \_\_\_\_\_ Outside diameter: \_\_\_\_\_  
 \*Amperage (live application only): \_\_\_\_\_ Bend radius: \_\_\_\_\_

## 4. Specifying Location of Components

**Optional Location of Components:**  
 Location of the inlet, outlet riser, and rewind mechanism can be varied to meet your requirements and **must be specified on your order**. Unless otherwise specified, most reels will be shipped as **Right Top Rewind** with the inlet, outlet riser, and rewind mechanism on the operator's right.

**RT - Right Top Rewind**  
 Standard - Always look at your reel from this position to determine right hand or left hand.

**RB - Right Bottom Rewind**

**LT - Left Top Rewind**

**LB - Left Bottom Rewind**

## 3. What features does the reel need? Check type of rewind:

**MANUAL REWIND**  
 Disc rewind (hand over hand)  Gear-driven crank  Direct crank (permanent or removable)  Chain-driven crank

**POWER REWIND**  
 Spring  Air  Electric (voltage): \_\_\_\_\_  Hydraulic


**Type of installation** (check one):  Floor  Wall  Overhead  Vehicle

Temperature Range: \_\_\_\_\_ Environment: \_\_\_\_\_  
 Accessories (if any): \_\_\_\_\_ Hose/Cable Stop:  Yes  No

Roller Assemblies:  
**Finish:**  Painted steel (standard)  Aluminum  Polished  Unpolished  Stainless steel  Polished  Unpolished

Note: Use component location initials as suffix after model number (ie: E1520-17-18 LT)

## Check type of installation and roller position for spring reels:

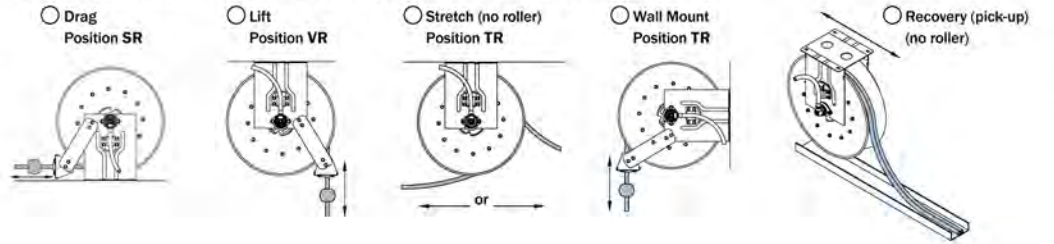

## 5. Please note size and/or weight limitations for your installation

**SPECIFICATIONS**

Depth: \_\_\_\_\_  
 Height: \_\_\_\_\_  
 Width: \_\_\_\_\_  
 Weight: \_\_\_\_\_